



## **SARL STUDY GUIDE FOR ENTRY LEVEL AMATEUR RADIO LICENCE (ZU)**

Revised 20 January 2007

### **Content**

- Syllabus
- Study guide

### **NOTES:**

This guide has been compiled from material published in the RAE Manual produced for the SARL by Andrew Roos ZS6AAA.

The copyright of this study guide is owned by the SARL. The guide may be copied and distributed at no cost provided acknowledgement is given to the South African Radio League. It may not be sold, but clubs may recover printing costs.

Serious study of the material in this guide will enable the candidate to write the entry level license examination (ZU)

Candidates should note that they require having a full copy of the regulations available for reference. Candidates will however only be examined on the regulations contained in the guide. However failure to comply with the provisions as contained in the full regulations is an offence.

The entry level license examination is not a HAREC examination and will not allow operation in other countries.

## **Syllabus for Radio Amateur Entry Level Course and Examination (ZU Licence)**

The examination will be by multiple choice. There will be 20 questions covering regulations and operating procedure and 10 questions on Part 2 (Technical). Candidates must achieve 50% in each section and an overall 65% to pass.

Candidates must also pass a hands-on HF operation test as for the ZS licence.

### **Part 1 Practical Operating Aspects**

**In addition to the multiple choice examination, the candidate will also have to do a hands-on test**

Familiarisation with the controls of a receiver, transmitter or transceiver

- a. Power On/Off, band switch, frequency tuning and display, volume, power level and display, microphone gain etc.
- b. HF operation
  - i. Tuning in USB and LSB,
  - ii. Making initial calls, calling CQ,
  - iii. Ability to make a contact(s) in the accepted format, signal reports, name and station information etc. thus demonstrating how the equipment is used.
- c. VHF operation
  - i. Ability to make a contact(s) as above for HF
  - ii. FM operation
  - iii. Operation through a repeater
- d. Need for a log book and the information to be recorded.
- e. Demonstrate understanding of antennas matching and the use of SWR meter.
  - i. Understand the importance of correct matching
  - ii. Ability to use the Standing Wave Meter and an Antenna Tuner to match an antenna to a transmitter.
  - iii. Fitting a coaxial connector
- f. Use the phonetic alphabet and common amateur vocabulary as necessary in b) and c).
- g. National Amateur band plans

### **Part 2 Technical Content**

The candidate is expected to have a very basic knowledge and must be able to add, subtract, multiply and handle fractions

1. Basics Units and symbols
  - b. Electrical circuits
  - c. Power and resistance
  - d. Ohms Law
  - e. Alternating currents and voltages
2. Frequency and wavelength
3. Transmitters
  - a. Block diagram of a simple transmitter

- b. Modulation types
- 4. Receivers
  - a. Block diagram of a simple receiver and detector
- 5. Feeders and Antennas
  - a. Feeders, coaxial and suitable plugs
  - b. Antenna types, dipole, ground plane, end fed wire
  - c. Antenna matching
  - d. Antenna Tuning Unit
  - e. Standing waves and SWR meters, radiated power and e.i.r.p.
  - f. Dummy loads
- 6. Propagation
  - a. Wave propagation
  - b. Range
  - c. Ionosphere
  - d. Daily changes in propagation
- 7. Electromagnetic Compatibility
  - a. Causes of interference
  - b. Minimising the problems
  - c. Earthing, antenna types
  - d. Power and emission types
  - e. Immunity
  - f. Social aspects
  - g. Sources of assistance
- 8. Safety Considerations
  - a. High voltages and currents
  - b. Mains plugs and earthing
  - c. Accidents
  - d. Antenna location
  - e. Batteries
  - f. General shock hazards

### Part 3 Amateur Radio Regulations

The candidate must have a knowledge and understanding of the Radio Regulations as pertaining to Amateur Radio and will be tested on the sections for a class B licence (ZU) and the general provisions of the regulations (Section G)

## Chapter 1 - Introduction to Amateur Radio

*This chapter has been designed to give you an introduction to the various facets of Amateur Radio. Although you are not being examined on this chapter, it forms a useful introductory basis for the chapters that follow.*

Amateur radio is a hobby that involves experimenting with radio (and related technologies like television and electronics) for fun and education. It is also known as “Ham Radio” and radio amateurs are sometimes referred to as “hams.” Like most hobbies, there are many different activities that fall under its umbrella.

### Communicating With Other Amateurs

Using radio to communicate with other amateurs is one of the foundations of the hobby. Most amateurs have a radio station of their own, which can range from a simple single-band handheld transceiver (a combination of a *transmitter* and a *receiver* is known as a *transceiver*) for talking to others in the same town, to a sophisticated station that is capable of worldwide communication. Many clubs also have club stations that are available for use by club members.

Radio amateurs communicate in many different *modes*. The most common are by voice (known as *phone* although it does not use the telephone system), Morse code (also referred to as *CW*) and various digital modes including *slow-scan television*.

The content of an amateur communication (known as a QSO) ranges from the briefest exchange of name and location up to long conversations (known as *rag-chews*) that may last an hour or more. Amateur radio is not like the phone system since you generally cannot dial a particular station. If you want to speak to a particular person, then you must agree a time and a frequency where you will meet – this is known as a schedule, or “sked” for short. Otherwise, you can just speak to whoever happens to be listening and is interested in a chat, which is a great way to make new friends. There are also some regularly scheduled networks (or “nets”) where operators who share a common interest get together at a particular time and frequency to exchange ideas.

### Collecting QSL Cards

After communicating with another amateur (especially one in a foreign country), it is customary to send a QSL card, which is a postcard-sized card with information about yourself and your station, and details of the QSO such as the date, time, frequency, mode and the call sign of the station worked. Many amateurs take a great deal of pride in their QSL cards, which are works of art. As well as being something to display and a nice reminder of the contact, QSL cards are often required if you wish to claim a contact for an award (see below).

### Building Radio and Electronics Equipment

Many amateurs build at least some of their equipment. Some build equipment from purchased kits or from plans found in amateur radio magazines. Others build their equipment from scratch, doing all the necessary design and sourcing the components themselves. The complexity ranges from simple projects, such as a computer soundcard interface that can be built in an evening to complete radio transmitters and receivers that may take months or years of work. Today microprocessors and

digital signal processing (DSP) is an increasingly important part of the hobby, so building equipment may also involve writing the necessary micro-controller or DSP programs. Of course, if you do not enjoy electronics, then everything you need to participate in the hobby can be purchased off the shelf.

### **Building Antennas**

Most amateurs build at least some of their own antennas. Antennas may range from a simple wire antenna suspended from a tree, to a complex multi-element beam sitting on top of a large tower. Antenna projects can be very rewarding as good results may be obtained from fairly simple designs. There are a number of software packages available that allow you to design an antenna and model its performance before you invest in the construction of the antenna.

### **Public Service and Emergency Communications**

Radio amateurs have a proud history of making their skills and equipment available for public service and emergency communications. On the public service side, amateurs provide communications for many sporting events such as rallies, marathons and cycle tours where their ability to communicate effectively from remote places is of great assistance to the organizers.

Many amateurs also ensure that their radio stations have some alternative power source (which could be batteries, a generator or solar power) so that they can continue to provide communications in the event that a natural disaster disrupts the telephone and power distribution systems. In South Africa, Hamnet, a special interest group of the South African Radio League, coordinates amateur emergency communications.

### **DXing**

“DXing” means communicating with as many different places as possible, often in order to qualify for certificates and awards. (The term comes from the use of “DX” as an abbreviation for “long distance.”) There are many different awards, including The DXCC (DX Century Club) certificate, which you qualify for by communicating with 100 or more different countries. The Worked All ZS award, for contacting 100 stations in the various regions of South Africa (the award’s name comes from the fact that “ZS” is one of the call sign prefixes assigned to South African radio stations).

### **DXpeditions**

Because DXers are always on the lookout for countries, islands, mountains or provinces that they have not worked before, there is often a flurry of interest and activity when a rare country or island is “activated” by some intrepid radio amateur setting up a station. Expeditions to unusual places for the purpose of setting up and operating a radio station there are called “DXpeditions,” and participating in DXpeditions is itself a very rewarding and challenging activity.

### **Contests**

Contests bring out the competitive nature of some radio amateurs, who enjoy the challenge to contact as many different stations as possible over a predetermined period of anything from an hour or two up to 48 hours. Contests may be run on a local, national, regional or international basis and may attract anything from 10 to 5,000

contestants. Many contests have several entry categories to allow similarly equipped stations to compete amongst each other.

### **Satellite Communications**

The amateur community has successfully launched a number of small communications satellites for the use of radio amateurs around the world. Communicating with other amateurs via satellite (or via the earth's natural satellite, the moon) gives radio amateurs an unparalleled opportunity to learn about the technology that underlies much of the modern era of communications. Because amateurs themselves develop these satellites as a cooperative, non-profit venture, those who are interested in the design and construction of satellites also have the opportunity to study the designs and may eventually be able to contribute to new amateur satellite projects.

## Chapter 2 - Basic Electrical Concepts

You will be examined on this chapter. The paper will have 10 questions.

### Basic Units and Symbols

#### Electrical Circuits

If you measure or calculate the amount of something, you usually need to specify the unit of measurement. For example, if you weigh something and then say that it weighs “10,” this does not mean very much unless you specify the unit of measurement – 10 grams, or 10 kilograms

The units of measure used in this course are the standard S.I. units that are used throughout most of the Western world. Each unit has a name, like “volt” or “ampere,” and a corresponding abbreviation, like “V” for volt and “A” for ampere. This saves time when writing quantities – for example a current of “10 A” rather than “10 amperes.”

V is volt

A is Amp (it measures current which is denoted by the symbol “I”

W is Watts

It is important to note that the way abbreviations are written have different meanings. When written in a capital letter (uppercase) the abbreviation indicates a large unit and when written in small letters (lowercase) a smaller unit. You need to know the following units:

m is milli for example mA which is one thousands of an Amp

M is mega for example MW is mega Watt or one million Watts

k is kilo for example kV which is 1000 Volt

#### Ohms Law

Ohm’s law states that the electric potential (V) across a conductor is proportional to the current (I) flowing through the conductor. It can be written as  $V = I R$ , where R is the *resistance* of the conductor. Resistance may be thought of as the opposition to the flow of electric current through a conductor or electric circuit. Resistance is measured in *ohms*, with the abbreviation  $\Omega$ . Ohm’s law can be used to find the electric potential across a conductor, or current flowing through the conductor, or the resistance of the conductor provided that the other two quantities are known.

**Ohm’s Law:**  $V = I R$

Note that the multiplication sign between “I” and “R” is omitted. In mathematics when two symbols are written next to each other, it is assumed that they are to be multiplied together.

This form of Ohm’s law is convenient if you know the current flowing through a conductor and the resistance of the conductor, and want to calculate the electrical potential (voltage) across the conductor. It shows that you can calculate the voltage by multiplying the current by the resistance.

For example, if a current of 5A is flowing through a conductor with a resistance of 2 ohm then the electric potential (voltage) across the conductor can be calculated by replacing the “I” with 5 and the “R” with 2 in the equation for Ohm’s law, giving  $V = 5 \times 2 = 10 \text{ V}$


Note the somewhat confusing use of “V” both as the symbol for electric potential (voltage) and also as the abbreviation for the unit “volt.” In this equation, the V on the left hand side (before the equals sign) is the symbol for electric potential. The V after the number 10 is the abbreviation for the unit, volts. The two meanings are not the same and you should take care not to confuse them. You should be able to work out the correct meaning from the context in which the “V” appears. The symbol E is also used for electric potential. So you may see Ohm’s law written as  $E = I R$  instead of  $V = I R$ .

### Rearranging Ohm’s Law

This is all well and good if you know the current and the resistance and want to calculate the voltage. However, Ohm’s law can also be used to find either the current or the resistance if both the other quantities are known. This is done by using simple algebra to rearrange Ohm’s law as follows:

There is a simple way of remembering Ohm’s law. Remember the diagram below and always write it down on your exam paper. It makes it easier to do any calculation.

To find the voltage, put your finger on the V and it shows that  $V = I \times R$ . To find the current in the circuit close the I with your finger and the formula is  $I = V/R$

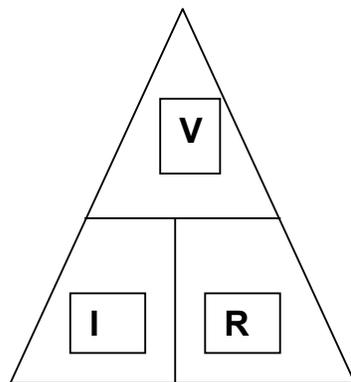

### Examples

(1) A resistor is connected across a 12 volt battery. The current flowing in the circuit is 2 amp. Calculate the value of the resistor

We want to calculate R so from the ohms law triangle the formula is  $V/I$   
 $V = 12 \text{ volt}, I = 2 \text{ Amp} \qquad R = 12/2 = 6 \text{ Ohm}$

(2) In a circuit the current flowing is 2 Amp through a 100 Ohm resistor. What is the

battery voltage?  $V = I \times R = 2 \times 100 = 200$  Volt.

### **The Resistor and Potentiometer**

Electronic circuits are usually constructed from components that can be purchased at electronics outlets. One such component is the *resistor*, which is simply a conductor that has a known resistance. Resistors are available in values ranging from a fraction of an ohm to several hundred mega-ohms.

### **Different Types of Resistors**

Resistors come in several different types, which are suited to specific applications: Carbon Film resistors are the most common, inexpensive, general-purpose resistors.

### **The Potentiometer**

A related component is the potentiometer, which has a variable resistance. This is typically constructed as a circular carbon track with a known resistance and a wiper that can be moved over the track by turning a control knob. The resistance from one side of the track to the other remains constant, but the resistance between either side of the wiper depends on the position of the control knob.

### **Alternating Current**

In direct current (D.C.) circuits, the current always flows in one direction. This is because the two terminals of the voltage sources used to power these circuits always have the same polarity – one terminal (the positive one) is always positive with respect to the other terminal. This causes the current to flow in only one direction in the circuit. However, in other circuits, the direction in which the current flows is constantly changing. The current flows first in one direction, then in the reverse direction, then in the original direction again and so on, with the direction changing at regular intervals, usually many times each second. The circuits are called *alternating current* (A.C.) circuits. Power for these circuits may be supplied by alternating current (A.C.) power supplies, such as the mains supply. With A.C. power supplies, there is no “positive” or “negative” terminal. Instead, one terminal will be positive with respect to the other for a brief period, and then the roles will reverse and the other terminal will become more positive for a brief period, and so on. Although the abbreviation A.C. stands for “alternating current,” it is also used to refer to voltages, in phrases such as “An A.C. Voltage” and “15V A.C.”

### **Capacitance and the Capacitor**

The capacitor is a component that consists of two electrically conductive *plates* separated by a thin layer of some insulating material known as the *dielectric*.

### **Inductance and the Inductor**

A typical inductor consists of a coil of wire, which may be wound around a former or may be self-supporting. When a current flows through the wire, it generates a magnetic field, just like an electromagnet would. Whenever the current flowing through the inductor changes, the corresponding changes to the magnetic field induce a voltage into the inductor that opposes the change in the flow of current. This is known as “self inductance” since the voltage is induced in the same coil that generates the

magnetic field.

### **Inductor Values**

The value of an inductor indicates how much energy it can store in its magnetic field, and hence how effectively it can oppose attempts to change the current flowing through it. The value of an inductor is measured in henrys; with the abbreviation H. Typical values are measured in micro-henrys ( $\mu\text{H}$ ) or milli-henrys (mH).

The value of an inductor depends on the number of turns and spacing between the turns of wire – the more turns, the higher the value. It also depends on the *permeability* of the material inside the coil, which may be air (for an *air-wound* inductor) or a metallic core (typically made of iron ferrite). The permeability of the core affects the strength of the magnetic field that will be caused by a current flowing through the inductor. Since iron ferrite has much higher permeability than air, a ferrite-cored inductor will have a greater inductance than an air-cored inductor with the same number of turns. Although iron ferrite cored inductors have higher inductance than air-cored inductors, they also have higher losses, especially at radio frequencies. Air core inductors may be wound with stiff wire, in which case they can be self-supporting, or they may be wound on a plastic former. Inductance is usually abbreviated “L,” since “I” is already taken for current!

### **Expressing Power Levels in dBW and dBM**

In the Radio Regulations, the power levels that apply to amateur transmissions are not expressed in watts, but rather in dBW. The unit dBW means “decibels referenced to 1 watt.” It is a way to express actual powers in decibel notation. Note that one cannot express an actual power – say 100 W – in decibels since decibels are used to express the *ratio* of two powers. However if you make one of the two powers a standard reference level, then by expressing the ratio of the other power to this standard reference level you can compute an actual power level. One of the common reference levels is 1 watt, and the resulting unit is given the abbreviation “dBW.” For example, the maximum power level specified for a Class A1 (ZS) license is 26 dBW. This means “26 dB over 1 watt.” Since 26 dB is a ratio of 400, 26 dBW means 400 W.

The maximum power level for a class B (ZU) license is 13 dBW which is 20 Watt

dBm is an abbreviation for the power ratio in decibel (dB) of the measured power referenced to one milliwatt (mW). It is used in radio, microwave and fiber optic networks as a convenient measure of absolute power because of its capability to express both very large and very small values in a short form.

### **Receivers**

There are many different types of receivers designed to receive a particular signal such as

- AM Amplitude Modulation – like a ordinary medium wave broadcast receiver or in its simplest form a crystal set receiver
- FM Frequency Modulation. This type of receiver is used to receive FM broadcast stations like radio 5, SAFM, RSG etc. Radio amateurs also use FM


receivers on VHF and UHF frequencies.

- SSB Single Side band Receivers. These receivers are used on the short-wave bands. A SSB signals can be likened to an AM signal. An AM signal consists of a carrier and two sidebands. In generating an SSB signal the one side band and the carrier are removed and only one sideband is transmitted. The receiver thus has to have the ability to re-insert the carrier to enable the signals to be converted back to AM. In Amateur Radio Lower sideband (LSB) is used on 40 and 80 metres and upper sideband (USB) on the bands below 40 metres

For the purpose of this course we will only discuss a basic crystal radio and a direct conversion receiver.

### The Crystal Radio

In years gone by every young person interested in radio would build a crystal set. The name comes from the fact that a small crystal with a catswisker was used as a detector. Now a day it is still fun to build a crystal set but replacing the crystal arrangement with a simple diode. Try the circuit below and you will have fun.

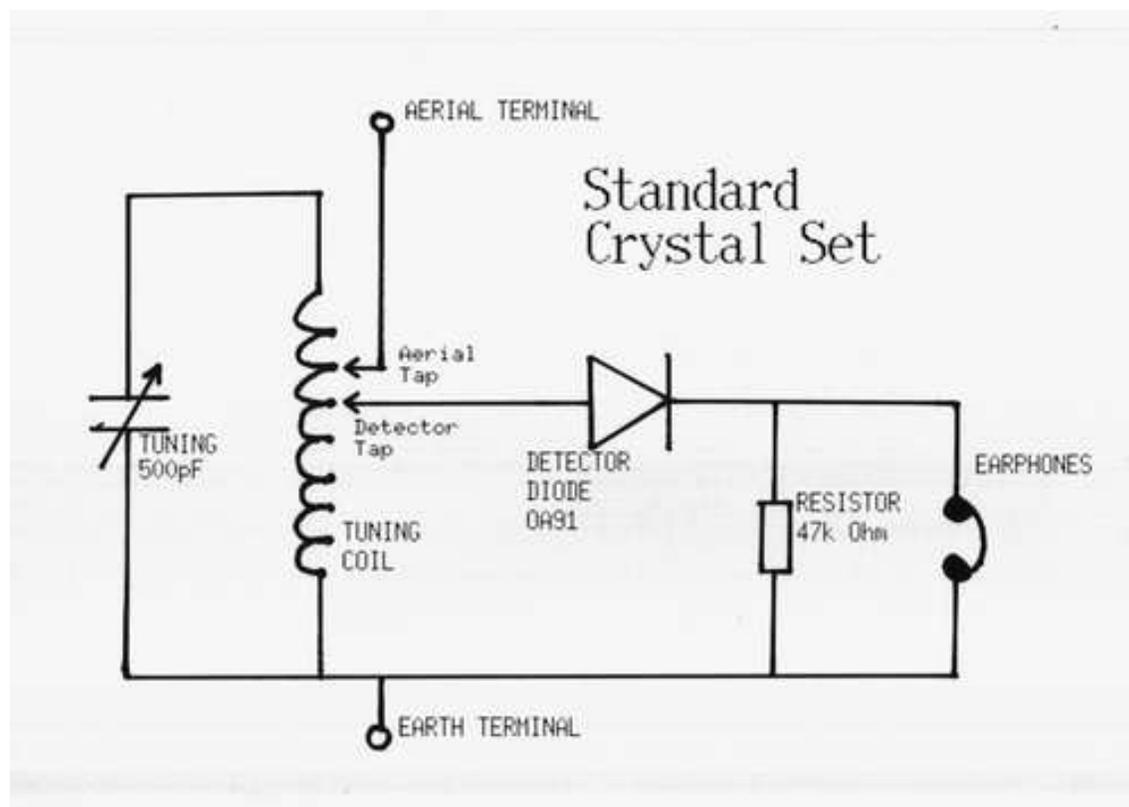

Because of the simplicity of crystal sets, it is often difficult to separate stations. When tuned into one station it is often possible to hear another close by station in the background, this is due to lack of *selectivity*. This can be reduced somewhat by adjusting the positions of the Aerial Tap and Detector Tap. Moving them closer to the bottom of the coil, the earthy end reduces the load on the tuned circuit and this improves selectivity, however it does also reduce *sensitivity* which can make the sta-

tion quieter. Headphones will often swamp a tuned circuit and reduce its selectivity (Q factor), so moving the tapping point lower down improves this situation. Every circumstance is bound to be different though so the best balance has to be found by experimentation.

The modern 'standard crystal set' shown above uses a Crystal Earphone, since suitable high impedance magnetic headphones (of 2000 to 4000 ohms) are no longer available. The resistor allows the current to flow through the circuit more efficiently when using a crystal earphone.

In a modern crystal set the detector used is a *Diode*. The most suitable diodes are OA81, OA91 or IN94 which are widely available.

The coil is 70 turns of 30 gauge enamelled copper wire wound around the centre of a toilet roll and tapped every 10 turns, by scraping off the enamel insulation and making a small twist.

The medium wave signal is fed from the antenna to the tuned circuit. The combination of the variable capacitor and the Inductance (coil) tune in the station for example 702 kHz, in other words the circuit is resonant at 702 kHz. The RF signal is rectified by the diode and the resultant weak audio signal to feed to the crystal earphone.

A lot of fun can be had with this simple device.


### **The Direct-Conversion Receiver**

A design that is used in quite a few homebuilt receivers is the Direct Conversion receiver. In a Direct Conversion receiver, the radio-frequency signal from the antenna is mixed with a locally generated oscillator signal, producing the usual sum and difference mixing products.

The frequency of the oscillator that generates this local mixing signal – it is known as the *local oscillator* (LO) or *beat frequency oscillator* (BFO) – is set so the difference mixing product is at audio frequency. In this way the Direct Conversion receiver “directly converts,” the desired radio frequency signals to audio, where it can be filtered and amplified. Let us look at the circuit in a little more detail.

The signal from the antenna first passes through a band pass filter. Its role is to reject interference from strong local commercial broadcast stations and the like.

The signal is then amplified by an RF amplifier and fed into the product detector, in the diagram represented by the symbol for a mixer – the circle with a cross in it. (“Mixer,” “Modulator” and “Product Detector” are different names for essentially the same circuit, depending on the exact role it plays.) The product detector mixes the amplified RF signal with a signal generated by the tuneable local oscillator, generating the usual sum and difference-mixing product.

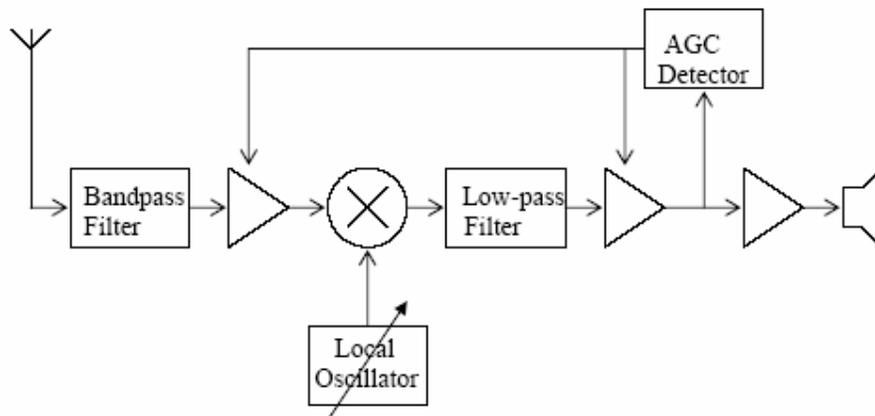

*A Direct-Conversion Receiver*

Suppose we want to receive an upper-sideband signal on 14.200 MHz. By convention, we refer to the frequency of a single-sideband signal as the frequency where the carrier would have been if it had not been suppressed. So the upper sideband of this USB signal (i.e. all that is left of it after the carrier and lower sideband were removed) will range in frequency from 14.2003 MHz to 14.2030 MHz, 300 Hz to 3 KHz above the (suppressed) carrier. If the local oscillator is set to exactly 14.200 MHz, – the frequency where the carrier would have been – then the difference mixing products will range in frequency between 300 Hz and 3 KHz. What we have done is to translate the USB signal from its frequency of 14.200 MHz back to the audio frequency range.

## Antennas

There are many different types of antennas, some are vertical, others slope and others again are horizontal. They all do the same work. Either receive radio signals or transmit radio signals.


Antennas convert electrical energy – which requires conductors to carry it – into electromagnetic energy, which is able to radiate through space. An electrical current flowing in a conductor generates a magnetic field in the space around the conductor. This is the principle behind electromagnets. If the current flowing in the conductor varies with time, then the magnetic field around the conductor will also vary with time. However according to the principle of induction a varying magnetic field will give rise to an electric field; and conversely, a varying electric field will give rise to a magnetic field. So by varying the current in a conductor, we can create a varying magnetic field, which will in turn create a varying electric field, which will create a varying magnetic field, and so on. The resulting interrelated varying electric and magnetic fields are called electromagnetic waves, and can travel long distances. At the frequencies that we are interested in, these electromagnetic waves are radio waves, although heat, light, and x-rays are also examples of electromagnetic waves of higher frequencies.

In electromagnetic waves, the electric and magnetic fields are perpendicular (at right angles) to each other, and both are perpendicular to the direction of motion of the wave. So if the electric field is horizontal with respect to the surface of the earth, the

magnetic field will be vertical; while if the electric field is vertical, then the magnetic field will be horizontal. We refer to the *polarization* of electromagnetic waves according to the orientation of the electric field. So if the electric field is horizontally oriented, then the wave is horizontally polarized; while if the electric field is vertically oriented, it is vertically polarized

Polarization is important because a vertically polarized antenna will not respond to horizontally polarized radio waves, and vice-versa. So for line of sight communications it is important that the polarization of the transmitting antenna should be the same as that of the receiving antenna.

### A simple dipole antenna

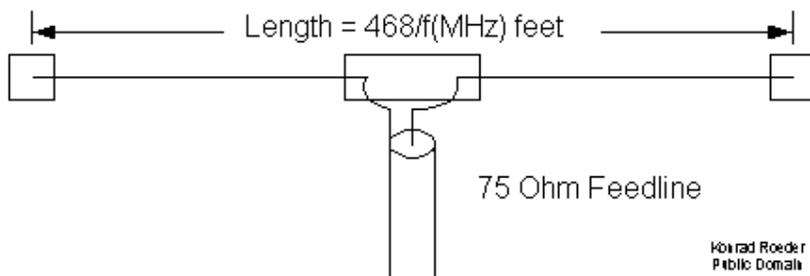

### Propagation

Propagation means the process by which radio waves get from the antenna of the transmitter to the antenna of a distant receiver. This chapter introduces the different propagation modes used by amateurs.

#### Direct Wave (line of Sight) Propagation

Electromagnetic radiation generally travels in straight lines, so if radio waves can travel straight from the transmitting antenna to the receiving antenna without passing through anything that blocks it, then communication is possible. This simplest form of propagation is known as “direct wave” propagation. It is also called “line of sight” propagation although this term is a bit misleading since some things that block light, such as a wooden structure, are transparent to radio waves.

Direct wave propagation affects all frequencies. The range possible depends on the terrain and the height of the antennas. In flat terrain, with both antennas 10m high, the range of direct wave propagation is about 20 km. However, hilly terrain can be used to good effect by placing one of the antennas on top of a hill where it can be “seen” from much further away. This is why VHF repeaters are usually located on high sites, since they rely on direct wave propagation.

#### Ground Wave Propagation

Low and medium frequencies *refract* around the surface of the earth. Refraction is caused by the nearby ground slowing the radio wave down slightly, causing it to bend towards the ground. However because the ground itself is bending with the curvature of the earth, the effect is that the ground wave “hugs” the earth. Refraction is most pronounced at lower frequencies, so this effect is most significant in the low and medium frequency bands. It is present but less effective in the high frequency

(HF) bands and absent at VHF and above. This is why you can still listen to medium wave AM commercial broadcast stations up to 100 km or so away from the transmitter – the medium wave broadcast frequencies (530 KHz – 1.6 MHz) are low enough for good ground wave propagation to occur. However commercial FM transmitters use VHF frequencies (88-108 MHz), which are only propagated by direct wave.

### **The Atmosphere**

The atmosphere consists of three layers: troposphere, stratosphere and ionosphere. The ionosphere is that part of the upper atmosphere where free electrons occur in sufficient density to have an appreciable influence on the propagation of radio frequency electromagnetic waves. It extends from approximately 50 km to 800 km above the earth's surface.

The ionosphere is divided into four layers. The D layer, which extends from 50-90 km above the surface, is only present during daylight hours. As soon as the sun's ionising radiation is no longer present, electrons and ions rapidly recombine to form neutral (un-ionised) gas and the D layer disappears. The principle effect of the D layer is to absorb radio waves. It affects low frequencies much more than high frequencies.

The upper three layers have a different effect. Instead of simply absorbing radio waves, they bend them by refraction. If a wave is bent sufficiently then it may return to earth a considerable distance from the transmitter, almost as though it had been reflected off the ionosphere. The amount of refraction (bending) depends on frequency is more pronounced at lower frequencies. The upper layers are the E layer, which extends from 90 to 150 m above the surface; the F1 layer, which extends from 150 to 180 km; and the F2 layer, which extends from 180 km to 300 km or higher. At night, the E layer dissipates while the F1 and F2 layers combine to form a single F layer that is less strongly ionised than during the daytime.

### **Sky Wave (Ionospheric) Propagation**

The effect of this is that during the daytime, the D layer will absorb low frequencies, but higher frequencies will make it through the D layer and can be refracted back to earth by the E, F1 or F2 layers. Higher frequencies still will not be refracted sufficiently by the E, F1 and F2 layers and will continue out into space instead of being returned to earth. Refraction by the F2 layer (or at night by the single F layer) is responsible for most long-distance HF communication.

At night, the D layer dissipates almost immediately and the E layer more gradually, while the F1 and F2 layers combine to form a single less strongly ionized layer. Now that there is no D layer to absorb low frequencies, they can be reflected from the F layer and travel long distances. However high frequencies are not be refracted sufficiently by the more weakly ionized night time F layer, so they will be lost into space.

This process of being refracted from the ionosphere is also known as “skip.” The maximum skip distance for the E layer is around 2 500 km, and about 5 000 km for the F layer. Longer paths may be achieved by multi-hop propagation, where the refracted signal bounces off the surface of the earth back to the ionosphere and is refracted back to earth again.

## **Electromagnetic Compatibility**

Electromagnetic compatibility (EMC) is the process of ensuring that equipment that radiates electromagnetic radiation, such as an amateur transmitter, does not interfere with equipment that may be sensitive to electromagnetic radiation, such as television and radio receivers.

EMC problems can be classified according to whether the device that is radiating the signal causing interference is an *intentional radiator* (that is, a device that is intended by virtue of its function to radiate, such as an amateur transmitter or a garage opening remote control) or an *unintentional radiator* (that is, a device that does not need to radiate in order to perform its intended function, such as a motor vehicle ignition system or an electric fence) and whether the device being interfered with is a *receiver* (that is, equipment designed to receive radio signals at some frequency) or is not a receiver (such as a CD player that is picking up breakthrough from nearby transmissions).

### **Unintentional Radiators**

There are strict limits to the maximum permitted radiation from any system that does not have to radiate in order to operate correctly. If a system that does not include a radio transmitter of some kind is causing interference, then that is generally because the system is radiating more than permitted, and it should be repaired or replaced at the owner's expense. For example, if you receive interference from a neighbour's electric fence, then that probably indicates that the electric fence is radiating more than is permitted, and the neighbour is responsible for having the defect rectified, and must turn the electric fence off until it complies with requirements. Of course convincing your neighbour of this may be difficult!

### **Interference to non-receiving equipment**

The converse applies when the equipment being interfered with is not intended to receive radio signals. For example, suppose your neighbour reports that your radio transmissions are "breaking through" on their stereo system when they are listening to CDs. Because the stereo system when listening to CDs is not supposed to receive radio signals, the problem lies with the stereo, not with the radio transmitter. Often the root cause is that the affected equipment was not designed for, and has not been tested in, environments with strong RF signals present. Unfortunately, it is quite legal for such equipment to be sold, and it will work fine for 99% of the time, since in most locations it will encounter only weak electromagnetic radiation from distant transmitters. Then an amateur moves in next door, sets up equipment that is operating within the limits of their license, and all of a sudden, the neighbour's CD player receives interference. It is quite natural for the neighbour to think that this is the amateur's fault, and that they must fix the problem or stop transmitting. However, in actual fact, the fault lies with the manufacturer of the equipment for not designing it to withstand the levels of electromagnetic radiation that may result from a nearby amateur installation.

In this case, even though it is the neighbour's responsibility to solve the problem, it would be diplomatic for the amateur concerned to make his or her technical skills available to the neighbour to help diagnose the problem and suggest solutions. Apart from good neighbourliness, the same neighbour may have the opportunity to comment on your application to erect a tower, and is more likely to be kindly dis-

posed to such a request if you South African Radio League Radio have helped them to solve any problems that appear to have been caused by your transmissions in the past!

### **Intentional Radiators interfering with Receivers**

The situation is slightly more complex if an intentional radiator (such as your amateur transmitter) interferes with a device that is intended to receive radio signals (such as your neighbour's television). In this case, the key question is the nature of the interfering signal. If the interfering signal is in all respects a legal licensed transmission – that is, it is within an amateur band, does not exceed the power permitted for the band and license holder, and is a clean signal – then the problem is being caused by the receiving equipment being affected by an out of band signal, and it is the receiving equipment that is defective and must be repaired. On the other hand, if the transmitted signal in any way does not conform with the requirements of your license, then you should first correct the problem with the transmitted signal before suggesting to your neighbour that they have their TV fixed! This is particularly important because if interference is reported to ICASA then their first course of action will probably be to inspect your transmitting equipment. If it is found to be out of order in any way then you may be held responsible for the interference and, even if you are not, the transmitting equipment can be confiscated if it does not conform with your license requirements. Once again, as a matter of diplomacy, it is a good idea to assist your neighbour if possible to solve the interference problem, even if you have determined that your transmitter is operating quite legally. As well as maintaining peace in the neighbourhood, this will help to maintain the good reputation of amateur radio. However if this is not possible – for example, if your neighbour refuses your assistance and insists that you just stop operating – then as long as you are certain that your equipment is operating legally, then you are entitled to continue to operate despite the interference to your neighbour's television or other equipment.

### **Electrical Safety**

In South Africa electrical mains power ranges between 220 and 240 Volt 50 Hertz, with 230 V the most common.

### **Safety around the Home**

Electricity surrounds us. Thus, to know more about it and to understand it further is important. The first and most critical aspect to learn about electricity is safety. Playing around with electricity can be dangerous. Make sure that you and your family know how to work with electricity safely.

### **Conducting important Routine Safety Inspections**

Equipment needing repairs or replacement should be attended to immediately. Not doing so could result in an accident. Breakages and excessive wear and tear on electrical equipment can occur frequently so you need to make regular inspections and take precautions to ensure your safety.

- Here are some general points to look for when making an inspection:

- Breakages
- Wear/deterioration
- Signs of overheating
- Missing parts (screws, covers, switches)
- Faulty appliance controls
- Doors and covers not closed smoothly or adequately.
- Correct labelling when needed (eg. Electricity requirements)
- Loose Fixtures or fittings

It is also important to test your equipment regularly - switch it on and off and look for possible problems or faulty connections. Taking time to make sure you are using your equipment safely could save your life later on.

### ***Plugs and Electric Sockets***

1. Look for the SABS sign and only use SABS approved plugs.
2. Do not overload plugs - rather use an adaptor.
3. Do not pull a plug by the cord.
4. Switch the switch off at the wall socket, before pulling the plug out.
5. Do not connect electrical appliances to light sockets.
6. Ensure that all wall sockets have their switches in the "off" mode, when not in use.
7. Never put bare wires into sockets.

### **How to fit a plug?**

1. Bare the ends of the three wires inside the electrical cord for about half a centimetre, by cutting away the plastic insulation.
2. Gently twist the strands of copper wire with your fingers until each strand is tight.
3. Fold over the twisted strands.
4. Remove the plug cover by either "snapping" or unscrewing it.
5. Unscrew the little screws on each of the plug's pins.
6. Insert the twisted copper wires into the holes in the pins.
7. The green and yellow wire must always be inserted into the top pin.

8. The blue wire is inserted into the left pin (the pin is marked with a blue spot or the letter N).
9. The brown wire is inserted into the right pin (the pin is marked with a brown spot or the letter L)
10. Tighten the little screw on each of the plug's pins.
11. Make sure the electrical cord is firmly gripped by the arrestor clips.
12. Replace the cover of the plug.

**The next section deals with operating procedure which you will be examined on. There will be 10 questions.**

## Operating Procedure

### HF Phone Procedures

#### The Phonetic Alphabet

The phonetic alphabet is used whenever information must be spelt out. It should be used for call signs when initiating a contact. Once it is clear that the other station has your call sign correct then you can revert to normal pronunciation (“ZU1XYX” instead of the phonetic “*Zulu Uniform One X-ray Yankee Zulu* .”

The standard phonetic alphabet is:

<i>Alpha</i>	<i>Juliet</i>	<i>Sierra</i>
<i>Bravo</i>	<i>Kilo</i>	<i>Tango</i>
<i>Charlie</i>	<i>Lima</i>	<i>Uniform</i>
<i>Delta</i>	<i>Mike</i>	<i>Victor</i>
<i>Echo</i>	<i>November</i>	<i>Whisky (or Water in Muslim countries)</i>
<i>Foxtrot</i>	<i>Oscar</i>	<i>X-Ray</i>
<i>Golf</i>	<i>Papa</i>	<i>Yankee</i>
<i>Hotel</i>	<i>Quebec</i>	<i>Zulu</i>
<i>India</i>	<i>Romeo</i>	

### Q CODES

The following are the official Q-codes. The last column indicate general usage

<b>QRM</b>	Are you being interfered with? <i>or</i> Is my transmission being interfered with?	I am being interfered with <i>or</i> Your transmission is being interfered with ...	Interference
<b>QRN</b>	Are you troubled by static?	I am troubled by static	Static interference
<b>QRP</b>	Shall I decrease transmitter power?	Decrease transmitter power.	Low power transmission normally 5 watt or less
<b>QRS</b>	Shall I send more slowly?	Send more slowly	Please send slower
<b>QRT</b>	Shall I stop sending?	Stop sending.	I am closing down
<b>QRV</b>	Are you ready?	I am ready.	I am ready to receive, write down etc
<b>QRX</b>	When will you call me again?	I will call you again at ... hours (on ... kHz (or MHz)).	Please stand by a moment
<b>QRZ</b>	Who is calling me?	You are being called by ... (on ... kHz (or MHz)).	Who is calling me
<b>QSL</b>	Can you acknowledge receipt?	I am acknowledging receipt.	Please send a QSL card
<b>QTH</b>	What is your position in latitude and longitude (or according to any other indication)?	My position is ... latitude, ... longitude (or according to any other indication).	My location (Town, city etc)

These words have been chosen so they are easily distinguishable from one another. This, plus knowing the words that are included in the phonetic alphabet, aids intelligibility in poor conditions. For example, if you hear only “elta” then you know the word must have been “Delta.” These advantages are lost if non-standard phonetics are used, so you should always use the standard phonetic alphabet.

### **Initiating Contacts**

Before calling, you should listen for at least 30 seconds to see whether the frequency is clear. If you do not hear anyone else on or near the frequency, then you can ask whether the frequency is clear:

*Is this frequency in use? Zulu Uniform One X-ray Yankee Zulu (ZU1XYZ)*

Wait another thirty seconds and if you have not heard anything then you can proceed to call “CQ” to ask for a contact.

*CQ CQ CQ this is Zulu Uniform One X-ray Yankee Zulu standing by.*

Wait for 5 seconds. If you do not receive a response, then call again. If after you have tried many times you still have not received a response, then this may indicate that propagation conditions are poor on the band you have chosen.

If you want, you can make a *directional* call, which means asking for only certain stations to reply. If you call *CQ DX*, this means you are asking for only “long distance” (DX) contacts, which usually means stations on another continent. If you call “CQ Europe” or “CQ Germany” then you are asking only for stations from a particular continent or country to reply.

### **Replying to a CQ**

If you hear a station calling CQ and you would like to make contact, then before you call, check the following:

1. Is it a directional call, and if so are you in the right area to respond? For example, a South African station should not respond to “CQ Japan” but may respond to “CQ Africa” or to “CQ DX” from a non-African station.
2. Make sure you know where the station is listening for a response. Usually this will be on the same frequency as their call. However rare DX stations may work “split” which means they are listening on a different frequency, generally higher than the one they are calling on. For example, if you hear a DX station call “Sierra Tango Zero Romeo Yankee up five” it means the operator will be listening 5 KHz higher than the frequency they called on. You will need to know how to activate the “split” function on your transceiver to work this station.
3. Ensure that a suitable antenna is connected and (if necessary) that your antenna tuning unit (ATU) is correctly set for the frequency and antenna. If the ATU is not set then *do not* tune up on the frequency where you hear the CQ call, as this most inconsiderate and will call interference to the station calling. Rather change frequency by at least 3 KHz to an unoccupied frequency, and after checking that the frequency is not in use, tune up there and then return to the frequency where you heard the call.

Of course it is wise to check these things *before* you search for stations calling CQ, so when you hear one you can respond immediately. Suppose you hear W1XX calling and having checked everything you are ready to call. Then you would say:  
*Whisky One X-ray X-ray this is Zulu Uniform One X-ray Yankee Zulu, Zulu Uniform One X-ray Yankee Zulu (ZU1XYZ) standing by.*

Note that the call sign of the station being called is always given *first*, and the call sign of the station calling comes *second*. This is important and getting it wrong will mark you as a poor operator.

It is unnecessary to repeat the call sign of the station you are calling several times – after all, she or he presumably knows his/her call sign, and unless conditions are bad, once is normally sufficient for them to see that you have got it right. Under poor conditions, however, you might want to repeat it a couple of times.

### **STONE**

- 1 -- Sixty cycle a.c. or less, very rough and broad
- 2 -- Very rough a.c. , very harsh and broad
- 3 -- Rough a.c. tone, rectified but not filtered
- 4 -- Rough note, some trace of filtering
- 5 -- Filtered rectified a.c. but strongly ripple-modulated
- 6 -- Filtered tone, definite trace of ripple modulation
- 7 -- Near pure tone, trace of ripple modulation
- 8 -- Near perfect tone, slight trace of modulation
- 9 -- Perfect tone, no trace of ripple or modulation of any kind

The Q-code “QTH” is often used to mean the location of the operator, although this is actually incorrect usage as the Q code should only be used in Morse code, and normal plain language should be used in Phone. So you might hear the following reply from W1XX: *Zulu Uniform One X-ray Yankee Zulu this is Whisky One X-ray X-ray. Thanks for the call, you are five and six, fifty-six. My name is Bob, Bravo Oscar November, and my QTH is Boston, Massachusetts. ZU1XYZ from W1XX.*

The signal report indicates that our signal is perfectly readable, with good signal strength. You would reply with a signal report, and also your name and location.  
*W1XX from ZU1XYZ Good morning Bob, thanks for the report. Your RST is five nine, five nine here in Cape Town. My name is Andrew, Alpha November Delta Romeo Echo Whiskey, Andrew. I’m testing a new rig here, a Kenwood TS850S, running 100 watts into a triband Yagi at 15 metres. Back to you Bob. W1XX this is ZU1XYZ.*

And so the conversation continues. You must by law identify your station on each separate transmission (each “over”). However once you are sure that the other station has got your

### **After the QSO**

If you have not already filled in your log during the QSO, then you should do so immediately after the QSO. Remember that you are required by law to keep a log of all HF transmissions (including unanswered CQs, but no-one actually logs these).

If you have offered to send a QSL card, then it is a good idea to write it out immediately, as it can become a chore if you wait for hundreds of QSOs to accumulate before writing out the cards.

## **Radio Regulations**

The following are the sections of the regulations that you will be examined on. However you should have a copy of the full regulations in your possession. Download a copy from [www.sarl.org.za](http://www.sarl.org.za)

### **TELECOMMUNICATIONS ACT**

**Regulations Act No. 103 of 1996 (including amendments promulgated in February 2005)**

#### **CHAPTER 1**

#### **DEFINITIONS**

“Any expression to which the meaning is assigned in the Act has the same meaning in these regulations and, unless the context otherwise indicates.

‘breakthrough’ means a disturbance to the normal operation of a radio or television receiving apparatus or other electronic or telecommunications apparatus as a result of the presence of strong electromagnetic fields generated by a transmitter;

(i) aeronautical station means a land station in the aeronautical mobile service, which may be on board a ship or vehicle in exceptional cases;

(ii) aircraft station aeronautical mobile means a mobile station in the service on board an aircraft or a spacecraft;

(iii) Antenna port means the last point preceding the feed line to the antenna

(iv) alarm station means a transmitting station in the land mobile service that is intended to transmit automatic alarm signals to a central position;

(v) amateur means someone who is interested in the radio technique solely for a private reason and not for financial gain and to whom the Postmaster General has granted an amateur radio station licence;

(vi) amateur radio station means a station for a service of self-tuition, intercommunication and technical investigation that is operated by an amateur;

(vii) base station means a land station in the land mobile service for a service with land mobile stations;

(viii) breakthrough’ means a disturbance to the normal operation of a radio or television receiving apparatus or other electronic or telecommunications apparatus as a result of the presence of strong electromagnetic fields generated by a transmitter;

(ix) ‘call sign’ means the allocation of identification letters and numbers as per ITU Radio Regulations article 19;

(x) 'CEPT' means the conference of the European Posts and Telecommunications Authorities

(xi) carrier wave power means the average power that is supplied by the transmitter to the antenna transmission line and is measured during one radio-frequency cycle in conditions of no modulation;

(xii) cellular radio communication service means a two-way C450 or GSM cellular radio communication service provided by means of radio between cellular stations and/or radio apparatus where the interconnection of stations, where applicable, are affected by means of telecommunication lines as defined in the Post Office Act, No. 44 of 1958, and where a limited number of frequencies is used within each of a number of cells allowing the re-use of the same frequencies in different non-adjacent cells and enabling users to maintain connections by the use of call handover whilst moving between adjacent cells;

(xiii) citizen-band radio service means a private, two-way, short-distance speech communication service in the land mobile service for personal and business operations, which Issue No. 4 (1998) may also be used as a paging system;

(xiv) coast station means a land station in the sea mobile service;

(xv) experimental station means a station that uses radio waves in experiments for the purpose of developing the science or technique but that is not an amateur radio station;

(xvi) 'HAREC' means a Harmonised Amateur Radio Examination Certificate issued in terms of CEPT recommendation TR61-02E

(xvii) ignition system means apparatus that has been assembled in order to supply and conduct electric energy for the ignition of gas or vapour in an internal-combustion engine;

(xviii) input means the direct current input (dc input) to the anode of the radio-frequency stage that immediately precedes the antenna;

(xix) inspecting officer means someone who has been appointed under regulation F8;

(xx) land mobile service means a mobile radio-communication service between fixed stations and mobile land stations, or between land mobile stations;

(xxi) Licencee means the person to whom a licence has been issued in terms of section 30 of the ACT

(xxiA) licence year in relation to a licence or a certificate, means the period of 12 months of each year from 1 January to 31 December, both dates inclusive;

(xxii) mobile station means a station that is intended to be operated while it is in motion or while it is stationary at an unspecified place;

(xxiii) paging station means a receiving station in the land mobile service that is intended to receive selective signals from a central position;

(xxiiiA) paid television broadcasting service a telecommunication service which transmits television programmes in encoded form for reception by users of television sets in possession of decoders which can be activated or deactivated by that telecommunication service by means of telecommunications;

(xxiv) peak envelope power means the average power supplied to the antenna transmission line by a transmitter during one radio-frequency cycle at the highest crest of the modulation envelope, taken under conditions of normal Issue No. 4 (1998) operation;

(xxv) plain language means words and expressions that make out an intelligible communication whereby all words and expressions have the meaning usually attached to them in the language to which they belong;

(xxvi) private communal radio repeater station service means a land mobile radio-communication service installed, maintained and operated by a private person over repeater stations that are available for communal use;

(xxvii) radio-beacon station means a station the radiation of which is intended to enable a mobile station to fix its position or obtain its bearing with regard to the radio beacon;

(xxviii) radio-communication means all telecommunication by means of radio waves;

(xxviiiAA) reception of television programmes for communal use means the direct reception of television programmes from satellite by means of a private receiver earth station for communal use by various persons on a single piece of land;

(xxix) relay or repeater station means a land station in the land mobile service;

(xxx) ship station means a mobile station in the maritime mobile service that has been erected on board a vessel other than a life-boat and that is not moored permanently;

(xxxi) special radio service means a radio-communication service that is not otherwise defined in these regulations and is operated solely for specified purposes of general benefit but not for public correspondence;

(xxxiiA) sound broadcasting service a broadcasting service destined to be received by a sound radio set;

(xxxiii) suppressor means an object that is designed to reduce the radiation of electromagnetic energy by the apparatus to which it is fitted;

(xxxiv) telecommunication means every transmission, emission or reception of signs, signals, writing, images and sounds or intelligence of any nature by wire, radio, optical or Issue No. 4 (1998) other electromagnetic systems;

(xxxv) The Act means the Telecommunications Act, 1996 (Act No. 103 of 1996)

## **CHAPTER 3**

### **AMATEUR RADIO STATIONS**

#### **B1 CONDITIONS FOR ISSUING OF AMATEUR RADIO STATION LICENCE**

(1) The Authority shall issue call signs to licenced radio stations and no other body shall acquire call signs on behalf of a group of persons or amateur radio stations

(2) The Authority may, subject to these regulations and the conditions set out in this Chapter, issue a Class A1, Class A2 or Class B Licence for the use of an amateur radio station.

(3) Class A1 unrestricted Licence may be issued to a person who -

(a) has furnished proof of his or her ability to correctly set up, adjust and operate an amateur HF transceiver; and

(b) is in possession of a HAREC issued or recognised by the Authority; and

(c) is in possession of a certificate issued by the national body approved by the Minister attesting that he or she has satisfactorily completed an assessment or criteria prescribed by the national body for this purpose that demonstrates advanced knowledge of theoretical or practical aspects of amateur radio.

(4) Class A2 (restricted) Licence (ZR - CEPT Class 2) may be issued to a person who -

(a) has furnished proof of his or her ability to correctly set up, adjust and operate an amateur HF transceiver; and

(b) is in possession of a HAREC issued by the Authority.

(5) Class B licence (ZU) may be issued to a person who -

(a) has furnished proof of his or her ability to correctly set up, adjust and operate an amateur HF transceiver; and

(b) is in possession of a certificate specified for a Class B licence.

(6) The Authority may issue an amateur radio station licence to a person who is in possession of a valid foreign amateur radio licence or amateur radio operator's certificate, equivalent to the relevant class of South African licence or certificate, issued by a recognised competent foreign authority and where there is a reciprocal international agreement between the Republic of South Africa and the other country.

(7) For the purposes of this regulation, "a person" shall mean a natural person and shall not include an association, company or other legal person: Provided that an amateur radio station licence may be issued to a licenced radio amateur in good faith, on behalf of an amateur radio association.

## B2 USE OF AMATEUR RADIO STATIONS

(1) An amateur radio station shall only be used by the holder of the amateur radio station licence issued by the Authority, provided that someone who holds an amateur radio operator certificate or HAREC issued in terms of the Act may be permitted by the holder of an amateur radio station licence to make transmissions over the amateur radio station under the supervision of the licensee on condition that such transmissions shall take place only for short periods and for the sole purpose of training.

(2) The holder of an amateur radio station licence may use an amateur radio station other than his or her own with the permission of the licensee concerned.

(3) An amateur radio listener's licence authorises the holder thereof to acquire and be in possession of radio apparatus for the reception of amateur radio signals only.

## B3 COMMUNICATION BY AMATEUR RADIO STATIONS

(1) The licensee is permitted -

(a) to engage in communication with other licenced amateur stations, using the permitted amateur bands, and such communications shall be restricted to comments on technical investigations, remarks of a personal nature and other items of a common interest; which shall not include commercial or business communications for which the public telecommunication service would have been used had the amateur communications not be available

(b) in the case of an emergency and where the safety of life or limb is at stake, to communicate with any other stations, using the amateur bands and other bands outside the amateur allocation to prevent loss of life, render assistance, call for assistance or convey health and welfare messages directly connected with the emergency,

(c) to practice emergency and event related communications, by providing communications for cycle, motor, marathon rallies and general community service, especially in times of national interest: Provided that the station engaged in the practise, be registered with the national body approved by the Minister in the Republic of South Africa, and be a holder of the appropriate class licence, for the frequency used;

(d) to carry out communications in plain language or Q Code;

(e) to send signals un-enciphered that form part of or relate to the transmission of messages (e.g. Identification Tones).

(2) An amateur radio station shall not transmit political, derogatory, racist, sexual, irreligious, improper, blasphemous, insulting, obscene or threatening remarks.

(3) An amateur radio station shall not advertise any goods, services or anything else, or transmit any news or messages on behalf of a third person: Provided that the Authority may authorise a Licencee to transmit

(a) reports on behalf of or by a third person during events that are in the opinion of the Authority in the public interest;

(b) information bulletins that are of direct interest to amateurs; and Morse Code for reception by persons learning Morse Code operation or for improving their competence in Morse code.

(4) For the purposes of this regulation, messages and signals include communication by any of the modes or types of modulation permitted in regulation B5.

(5) Appointed and licensed amateur radio stations in the Republic of South Africa are permitted to broadcast news bulletins and programs of general interest which are of a general nature to further the amateur radio service, radio science and electronics generally.

(6) The Authority may allow stations registered as educational stations to demonstrate amateur radio to persons who do not hold an amateur radio licence by allowing them to speak and operate the station under the supervision of a licenced amateur participating in a special educational event or at educational institutions.

#### B4 LOG BOOK WITH REGARD TO AMATEUR RADIO

##### STATION ACTIVITIES

(1) The licencee shall keep a log book recording the activities of the amateur radio station used by him or her or any other person under supervision of the licencee, except when operating a station in the VHF and UHF bands.

(2) Details recorded in the log book referred to in sub-regulation (1) shall include -

(a) the date, time and nature of each transmission. The date with regard to each individual day's operations need be recorded only once and for the purposes of this paragraph "time of each transmission" shall mean the time that a specific station is called and the time at which the communication with such station is terminated;

(b) the full name and address of the person making the transmission: Provided that the name of the licencee who regularly uses the amateur radio station need be recorded only once in the log book together with an explicit statement that all transmissions are made by him except where stated otherwise; the transmit power that is used; the frequency band that is used: Provided that it need be recorded in the log book only once until a change of frequency to another authorised band takes place;

and the call sign of every station: provided that it need not be recorded repeatedly for calls made to the same station during the course of the communication; the address from where the transmission takes place: provided that such address need be recorded only once should the place of transmission not change.

#### B6 LIMITATIONS IN RESPECT OF CLASS B LICENCEES

(1) A Class B licensee may not use an amateur radio station for the transmission of any form of entertainment: Provided that music transmissions, television transmissions and spread-spectrum communications may be permitted for experimental or tuition purposes under the supervision of the holder of a Class A1 or A2 licence and in accordance with the requirements of regulations B7, B8 and B9 respectively.

(2) No person may operate an amateur radio station using frequency bands, modes of emission or at maximum power levels other than those specified for Class B licence holders in regulation B5 (2)

#### B11 RESTRICTIONS WITH REGARD TO TRANSMISSIONS BY AN AMATEUR RADIO STATION

(1) An amateur station may not transmit damped wave emissions.

B12 Previously deleted

#### B13 FREQUENCY MEASURING EQUIPMENT

Every amateur or experimental radio station shall have frequency measuring equipment with an accuracy of at least 0,1 per cent unless the frequencies of all transmitters of the station are crystal controlled and are accurate to at least 0,1 percent.

#### B14 MOBILE AMATEUR RADIO STATION

(1) An amateur holding a Class A1, A2 or B licence may use a mobile amateur radio station within the boundaries of the Republic.

(2) When a mobile amateur station is used in an amateur radio zone other than that in which the amateur resides, the call sign allocated to the main station shall

(a) in the case of continuous-wave radiotelegraphy, be followed by the signal -the letter M and the number of the zone from where the station is operated; and

(b) in the case of radiotelephony be followed by the word "mobile," followed by the number of the zone from where the station is operated.

(3) For the application of the provisions of sub regulation (2) in respect of zones the different zones of the Republic of South Africa are indicated in Annexure F of the Regulations.

## CHAPTER 8

### MISCELLANEOUS PROVISIONS

#### G1 Allocation and display of call sign

ICASA allocates a call sign to a radio station. Such call sign shall be conspicuously displayed on the relative radio set by the licensee and the call sign must be transmitted at least once during each separate transmission.

#### G2 Radio apparatus must satisfy ICASA's requirements

Radio apparatus shall satisfy ICASA's requirements at all times and may not be capable of being tuned to frequencies other than those laid down for use by licensees by ICASA in these regulations or separately. ICASA may allocate frequencies on a shared basis and co-users of them must make mutual arrangements for the satisfactory utilisation of the facility.

#### G3 ICASA may require certain modifications to a station

A licensee shall be obliged to effect at his own cost any modification to his radio-communication system that ICASA has indicated and the ICASA shall by no means be liable to the licensee or any other person for any damage or loss arising from such modifications.

#### G4 Interference, condition of station and compliance with requirements ICASA and local authority

(1) The licensee shall be obliged to maintain all radio apparatus at a station technically in a good condition and to ensure at all times that it satisfies the requirements of ICASA and does not cause interference with the reception and transmissions of other radio users or telecommunication lines.

(2) The antenna system shall comply with the requirements of the relevant local authority.

#### G5 Indecent language and fraudulent transmissions over stations prohibited

No person shall transmit insulting, improper, obscene, blasphemous or threatening language over the radio apparatus. Communications shall be concise and limited to essentials and no music or entertainment of any nature shall be transmitted. Similarly no sounds or effects for entertainment or for the purpose of drawing attention shall be transmitted.

#### G6 Use of station for any purpose other than that of licence prohibited

(1) No person shall use radio apparatus for a purpose other than that for which the licence was issued and neither shall radio apparatus be used in circumstances where ordinary telephone facilities can serve the purpose.

(2) No licensee shall make transmissions from a place outside the area for which he is licensed.

G7 Use of station restricted to licensee or someone in his employ or under his control

Except where provided to the contrary in these regulations only the licensee or someone in his employ or under his control, may operate the station in respect of which the relative licence was issued.

G8 Distress signal

No person shall transmit without sound reason the distress signal

(i.e. "... --- ..." in radio telegraphy and the word "MAYDAY" in radio telephony).

G9 Licence not transferable and must be returned on expiry/suspension

(1) Except with the approval of ICASA no person to whom a licence was issued in terms of the Act or these regulations shall transfer such licence, powers or authority granted to him to any other person or surrender it in any other way in favour of someone else.

(2) A licence issued in terms of the Act and these regulations shall, on expiry or suspension, be returned to ICASA within 14 days of such expiry date or date of suspension.

G10 Period of validity of licence

(1) Unless a licence issued in terms of the Act and these regulations was previously suspended by the Postmaster General in terms of section 14 of the Act, or unless the provisions of the licence provides otherwise, it shall remain valid until 31 December of the year in which it was issued, and thereafter on payment of the prescribed annual licence fee until 31 December of each succeeding year: Provided that a broadcasting licence issued in terms of the saving clause of section 7 (1) of the Radio Act, 1952, to a person other than the South African Broadcasting Corporation shall be valid for 20 years.

(2) Fees in respect of existing licences shall be paid before or on 31 January.

G10A Amendments of conditions of licences

ICASA may at any time if it deems it necessary, either prior to or subsequent to the commencement of this regulation, amend or revoke any condition with reference to a licence issued by the authority and prescribed in terms of section 7 (1) of the Radio Act (Act 3 of 1952).

G11 Radio-communication between two or more fixed points and connection with public telephone system prohibited Except with the approval of the Postmaster General and subject to these regulations, no person shall-

- (i) Operate radio-communication between two or more fixed points;
  - (ii) connect radio apparatus in any way whatsoever to the public telephone system;
- and

(iii) transfer to another place radio apparatus in respect of which authority was granted for installation at a particular place.

#### G12 Tests

The licensee of a station may carry out the routine tests that are necessary for the proper maintenance of his station.

#### G13 Change of address

Every licensee who changes his address shall advise ICASA of the new address of his station within 14 days of the change.

#### G14 Radio receiving apparatus with continuous tuning

No person shall use or have in his possession any radio receiving apparatus with continuous tuning that can be tuned to bands above 30 MHz other than the international broadcasting and amateur bands except where the Postmaster General's prior approval was obtained.

#### G15 No regulation

#### G16 Operation of station on board ship while it is in harbour

(1) The master of a ship shall ensure that the radio installation on board is not used for radio-communication while the ship is berthed or anchored in a harbour in the Republic, except for the purposes of type F3 transmissions in the VHF maritime mobile band to communicate with-

- (i) the nearest coast station in the Republic that is open for public correspondence;
- (ii) the port operations service; and
- (iii) a vessel on its way to the harbour or berth provided the communication is limited to navigational safety.

(2) The restriction contained in sub-regulation (1) shall not apply to the apparatus used on board ships for establishing communication via any satellite of the INMARSAT organization.

#### G16A Issue of a broadcasting licence in relation to paid television broadcasting service

The Postmaster General may issue a broadcasting licence to any person to establish, maintain and operate a television service for the purpose of providing, for reception by the general public, a paid television broadcasting service, and an additional restricted television broadcasting service the restrictions of which are mentioned in the licence.

#### G17 Recognition of licences/certificates issued by other countries

Notwithstanding provisions to the contrary in these regulations the Postmaster General may issue a licence or certificate as required by section 7 of the Act to a person who, in the opinion of the Postmaster General, possesses a similar licence or certifi-

cate issued by another country despite the fact that such person does not satisfy specific other requirements stipulated by these regulations for the acquisition of the licence or certificate.

**Good luck**

## ANNEXURE G

Frequency bands. ZU (Class B) license holders may only operate on certain designated bands show in the grey areas. For exam purposes candidates will be required to know the band allocated to the class B (ZU) license.

Frequency bands in MHZ	The Amateur Service	Maximum Power in dB relative to 1 watt PEP	Satellite	Permitted types of transmission	Remarks
1 810 - 1.850	Primary	A1 = 26 dBW A2 = 20 dBW		All except pulse or fast scan TV	No Class B operation
3.500 - 3.800	Co-primary	A1 = 26 dBW A2 = 20 dBW B = 13 dBW		All except pulse or fast scan TV	
7.000 - 7.100	Primary	A1 = 26 dBW A2 = 20 dBW B = 13 dBW	Allocated	All except pulse or fast scan TV	
10 100 - 10.150	Secondary	A1 = 26 dBW		All except pulse or fast scan TV	No Class A2 or Class B operation International Band
14.000 - 14.350 14.070 - 14.099 14.225 - 14.250	Primary	A1 = 26 dBW A2 = 20 dBW A2 = 20 dBW	Allocated	All except pulse of fast scan TV	No Class B Operation International band
18.068 - 18.168	Primary	A1 = 26 dBW	Allocated	All except pulse or fast scan TV	No Class A2 or Class B operation International Band
21.000 - 21.450 21.070 - 21.120 21.300 - 21 450	Primary	A1 = 26 dBW A2 = 20 dBW A2 = 20 dBW	Allocated	All except pulse or fast scan TV	No Class B operation International band
24.890 - 24.990	Primary	A1 = 26 dBW	Allocated	All except pulse or fast scan TV	No Class A2 or B operation International band
28.000 - 29.700	Primary	A1 = 26 dBW	Allocated	All except pulse or fast scan TV	No Class B operation International band

Frequency bands in MHZ	The Amateur Service	Maximum Power in dB relative to 1 watt PEP	Satellite	Permitted types of transmission	Remarks
28.050 - 28.150		A2 = 20 dBW B = 13 dBW			
28.300 - 28.500		A2 = 20 dBW B = 13 dBW			
29.700 - 30.000	Secondary	26 dBW		All	Secondary basis during disaster exercises and emergency situations. Single frequency mobile applications.
40.675 - 40,685	Primary	A1 = 13 dBW	Allocated	All except pulse or fast scan TV	Propagation study only
50.000 - 54.000	Co-primary	A1 = 26 dBW A2 = 26 dBW		All except pulse or fast scan TV	No Class B operation
70.000 - 70.300	Secondary	All Classes 14 dBW		All except pulse or fast scan TV	
144 – 146	Primary	A1 = 26 dBW A2 = 26 dBW B = 13 dBW	Allocated	All except pulse or fast scan TV	International Band
430 - 440	Co-Primary	A1 = 26 dBW A2 = 26 dBW B = 13 dBW		All except pulse or fast scan TV	
435 - 438			Allocated		
1240 – 1300	Secondary	A1 = 26 dBW A2 = 26 dBW		All except pulse	International Band
1260 - 1270			Allocated		
2300 - 2450	Secondary. Users must accept Interference from ISM users	A1 = 26 dBW A2 = 26 dBW		All except pulse	No Class B operation
5650 - 5850	Secondary. Users	A1 = 26 dBW	Allocated	All except pulse	No Class B operation

Frequency bands in MHZ	The Amateur Service	Maximum Power in dB relative to 1 watt PEP	Satellite	Permitted types of transmission	Remarks
	must accept Interference from ISM users	A2 = 26 dBW			International Band
10000 - 10450	Secondary	A1 = 26 dBW A2 = 26 dBW		All - including pulse	No Class B operation
10450 -10500	Secondary	A1 = 26 dBW A2 = 26 dBW	Allocated	All - including pulse	No Class B operation International Band
24000 - 24050	Primary	A1 = 26 dBW A2 = 26 dBW	Allocated	All - including pulse	No Class B operation International Band
24050 - 24250	Secondary. Users must accept Interference from ISM users	A1 = 26 dBW A2 = 26 dBW		All - including pulse	No Class B operation International Band
47000 -47200	Primary	A1 = 26 dBW A2 = 26 dBW	Allocated	All - including pulse	No Class B operation International Band
75500- 76000	Primary.	A1 = 26 dBW A2 = 26 dBW	Allocated	All - including pulse	No Class B operation International Band
76000 -81000	Secondary. Users must accept Interference from ISM users	A1 = 26 dBW A2 = 26 dBW	Allocated	All - including pulse	No Class B operation International Band
142000 -144000	Primary	A1 = 26 dBW A2 = 26 dBW	Allocated	All - including pulse	No Class B operation International Band
144000 -149000	Secondary. Users must accept Interference from ISM users	A1 = 26 dBW A2 = 26 dBW	Allocated	All - including pulse	No Class B operation International Band
241000 -248000	Secondary	A1 = 26 dBW A2 = 26 dBW	Allocated	All - including pulse	No Class B operation International Band
248000 -250000	Primary	A1 = 26 dBW A2 = 26 dBW	Allocated	All - including pulse	No Class B operation International Band

Note: You will be examined on the highlighted portion of the frequency table.